

## Peak Emission Wavelength: 1100nm


The 1100nm IR emitter series is designed for applications requiring precise optical / mechanical axis alignment and IR radiation in the SWIR range. Custom package solutions and sorting are available.

### FEATURES

- > Metal Can Package
- > Wide Beam Angle
- > High Reliability

### APPLICATIONS

- > Bio Medical Applications
- > Optical Sensors
- > Optical Communications

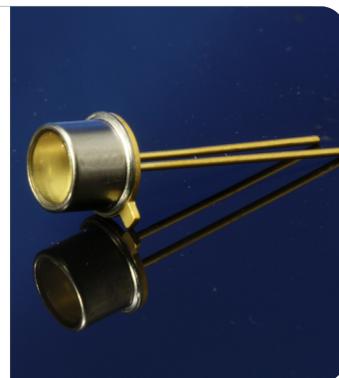

## Absolute Maximum Ratings (Ta=25°C)







ITEMS	SYMBOL	RATINGS	UNIT
Forward Current (DC)	IF	100	mA
Forward Current (Pulse)*1	IFP	1	A
Reverse Voltage	VR	5	V
Power Dissipation	PD	100	mW
Operating Temperature Range	Topr	-20 ~ +85	°C
Storage Temperature Range	Tstg	-30 ~ +100	°C
Lead Soldering Temperature*2	Tls	260	°C

\*1: Tw=10μsec, T=10msec; \*2: Time 5 Sec max, Position: Up to 3mm from the body.


## Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Power Output	PO	IF=50mA	--	18.2	--	mW
Forward Voltage	VF	IF=50mA	--	1.48	--	V
Power Output	PO	IF=20mA	--	7.21	--	mW
Forward Voltage	VF	IF=20mA	--	1.18	--	V
Peak Emission Wavelength	$\lambda_p$	IF=20mA	--	1100	--	nm
Spectral Line Half Width	$\Delta\lambda$	IF=20mA	--	39	--	nm
Half Intensity Beam Angle	$\Theta$	IF=20mA	--	102	--	deg

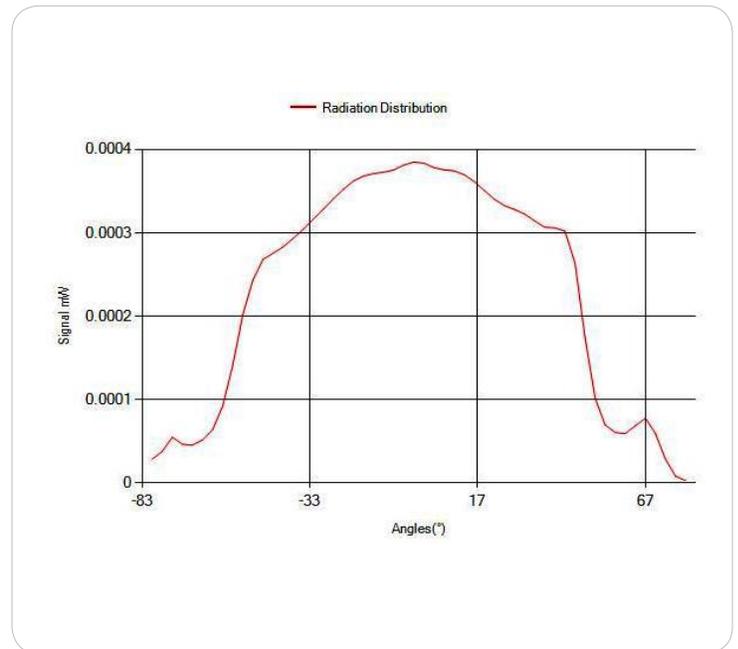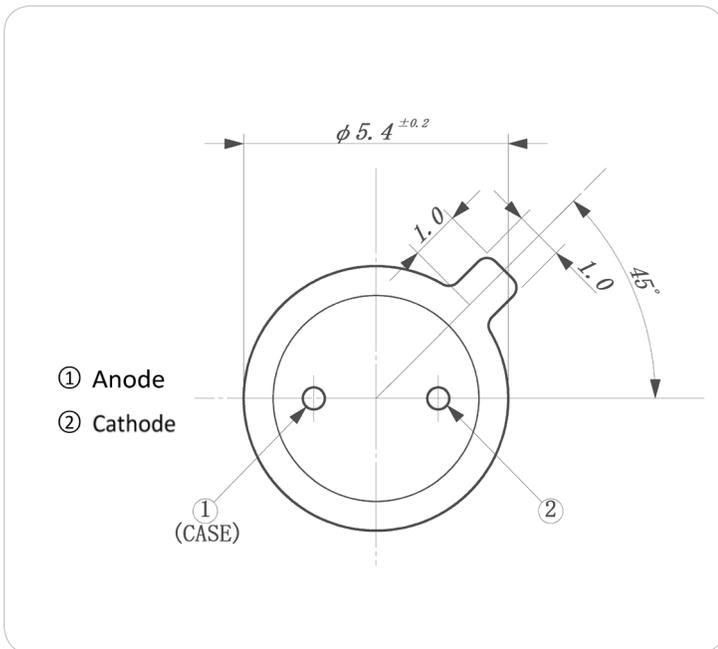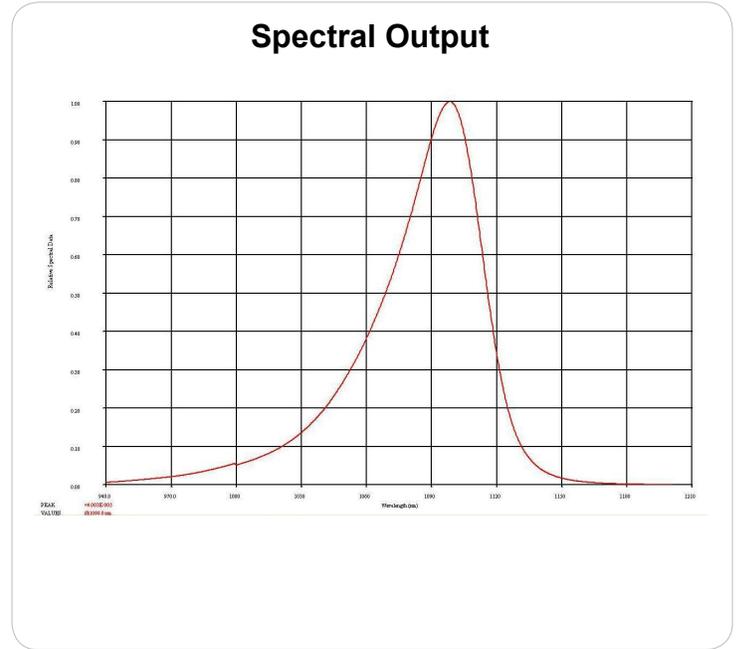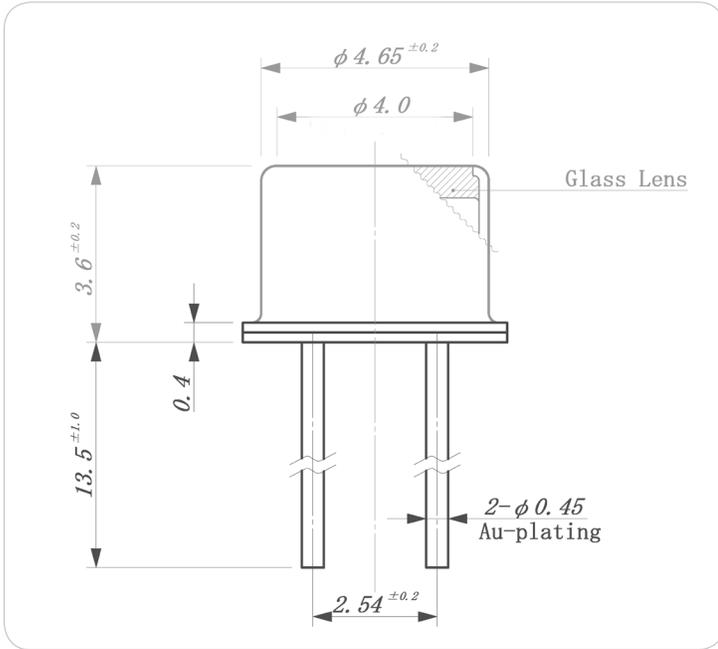

Unit: mm, Tolerance:  $\pm 0.2$

**RADIATION PATTERN**

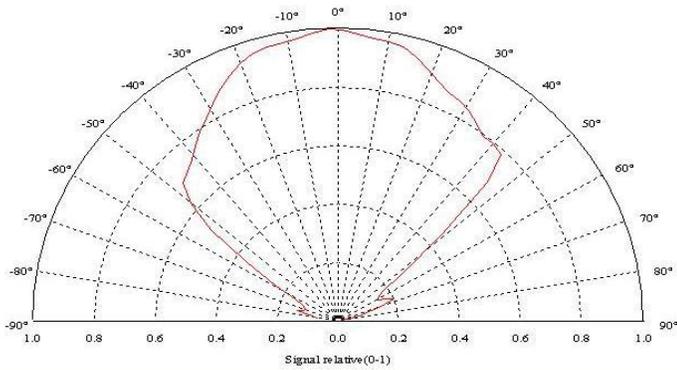

The information contained herein is subject to change without notice.

2026-01-08

Global Headquarters, 3 Northway Lane North, Latham, NY 12110, USA [www.marktechopto.com](http://www.marktechopto.com)

TOLL FREE: 1-800-984-5337 • PHONE: 518-956-2980 • FAX: 518-785-4725 • EMAIL: [info@marktechopto.com](mailto:info@marktechopto.com)