

## Peak Emission Wavelength: 255nm

The MTE2550B-UV is a powerful deep UV-C emitting device. The TO-39 packaged device delivers 15-degree view angle to enhance the radiant intensity.


Custom package solutions and sorting are available.

### FEATURES

- > Deep ultraviolet LED
- > Mercury Free
- > Hermetical Seal
- > ESD protection
- > Silanna Safe

### APPLICATIONS

- > Chemical and biological analysis
- > Water quality monitoring
- > Gas sensing
- > Liquid chromatography

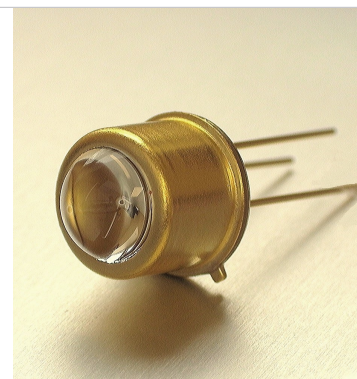

## Absolute Maximum Ratings (Ta=25°C)




ITEMS	SYMBOL	RATINGS	UNIT
Forward Current	IF	50	mA
Operating Temperature	Topr	0 ~ +60	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Junction Temperature	Tj	65	°C
ESD Classification		2	

\*1: Within 5 seconds.


## Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN.	TYP	MAX.	UNIT
Forward Voltage	VF	IF=20mA	5	--	7	V
Peak Wavelength	$\lambda_p$	IF=20mA	250	255	260	nm
Radiant Flux	PO	IF=20mA	0.35	0.65	--	mW
Radiant Intensity	I	IF=20mA	0.35	0.65	--	mW/Sr
FWHM	$\Delta\lambda$	IF=20mA	--	11	18	nm
View Angle	$\Theta$	IF=20mA	--	19	--	deg
Power Dissipation	PD	IF=20mA	--	0.12	--	W
Thermal Resistance Junction-Case	Tth	IF=20mA	--	10	--	°C/W

Package Dimensions

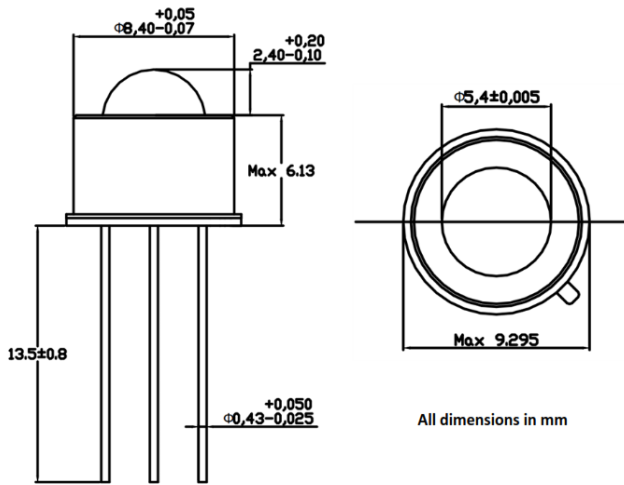

Note: The pin closest to the tab is Anode.

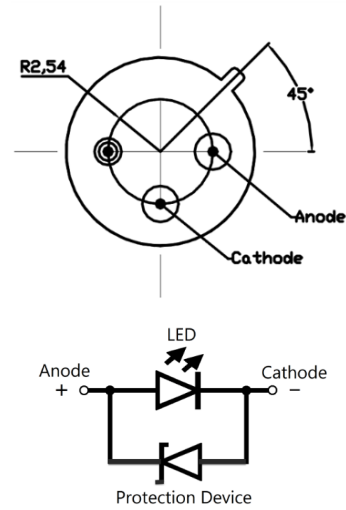

Note: The pin closest to the tab is Anode.

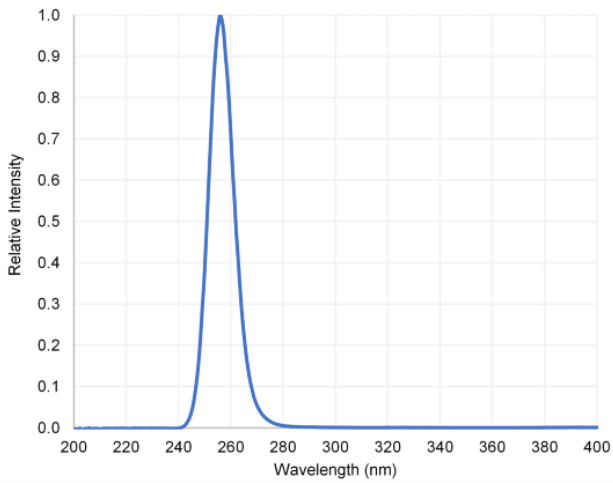


Figure 1. Relative emission intensity vs wavelength  
 $T_A=25^\circ\text{C}$ ,  $I_F=20\text{ mA}$

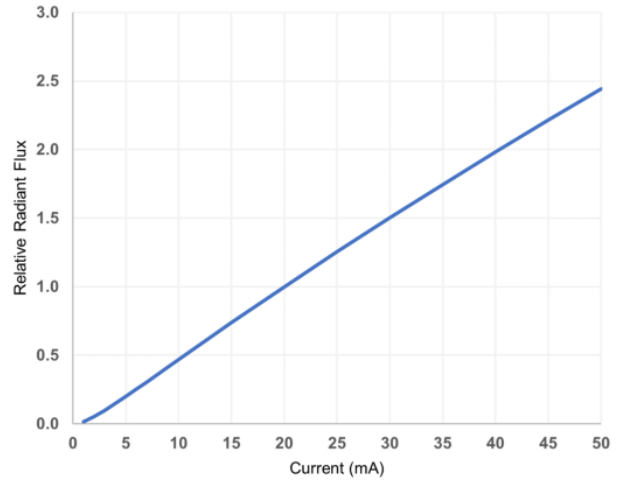


Figure 2. Relative radiant flux vs forward current  
 $T_A=25^\circ\text{C}$

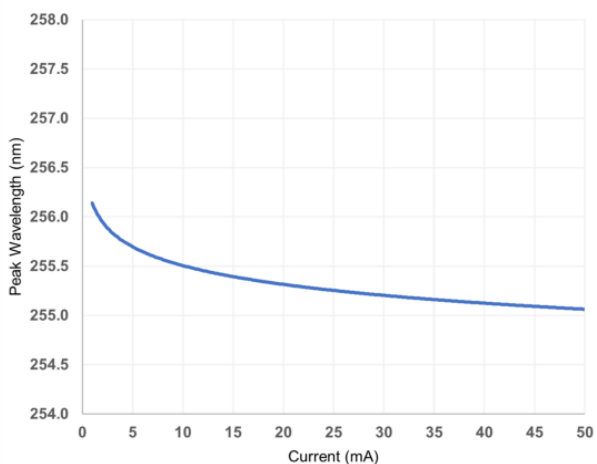


Figure 3. Peak wavelength vs forward current  
 $T_A=25\text{ }^\circ\text{C}$

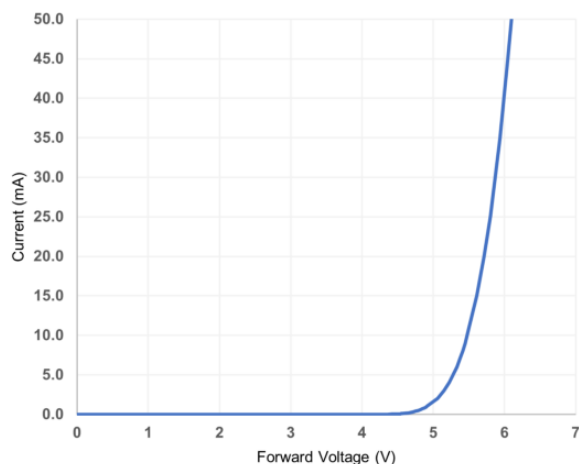


Figure 4. Forward current vs forward voltage  
 $T_A=25\text{ }^\circ\text{C}$

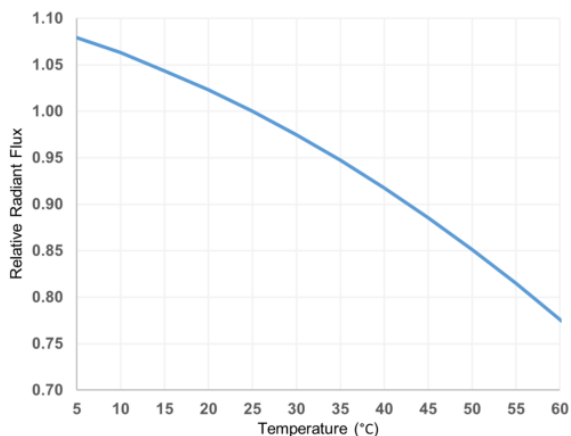


Figure 5. Relative radiant flux vs temperature  
 $I_F = 20\text{ mA}$

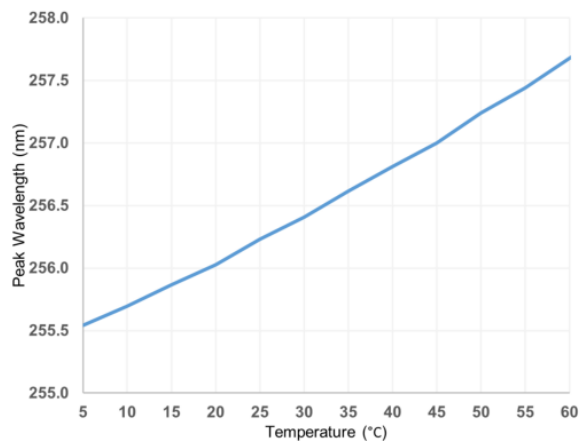


Figure 6. Peak wavelength vs temperature  
 $I_F = 20\text{ mA}$

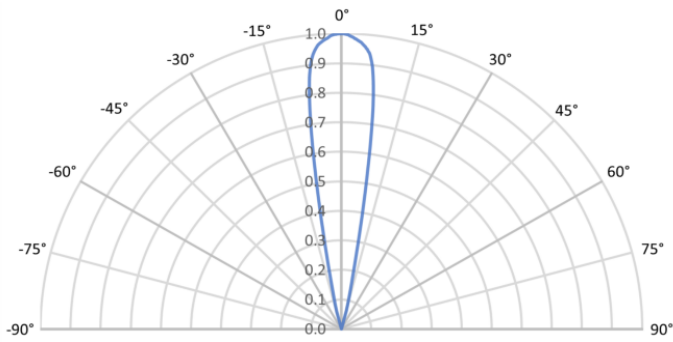


Figure 7. Radiation pattern  
 $T_A=25^\circ\text{C}$ ,  $I_F = 20\text{ mA}$

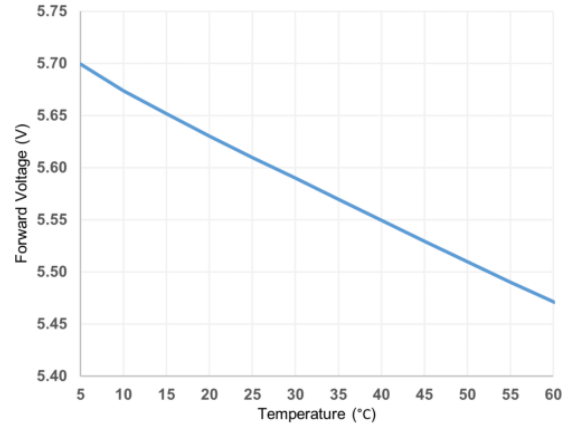


Figure 8. Forward voltage vs temperature  
 $I_F = 20\text{ mA}$

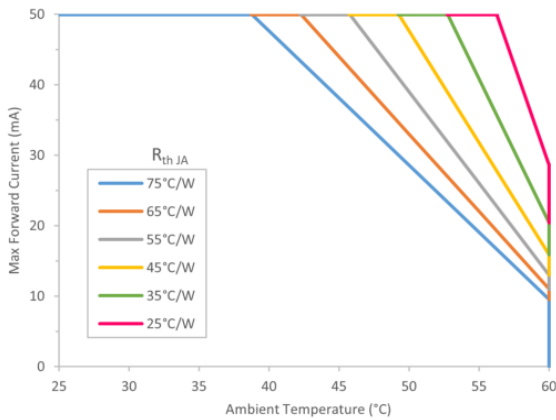


Figure 9. Max Forward current de-rating

Unit: mm

2025-02-10

## Soldering

### Soldering conditions

Parameter	Dip Soldering Lead-free solder	Hand Soldering Lead-free solder
Pre-heat	90°C max (backside of PCB)	
Pre-heat time	60 seconds max	
Temperature	260°C max (Solder bath)	300°C max
Soldering time	5 seconds max	3 seconds max

\* Distance between melted solder sides to bottom of LED should be 3mm or greater

### Soldering Temperature Profile

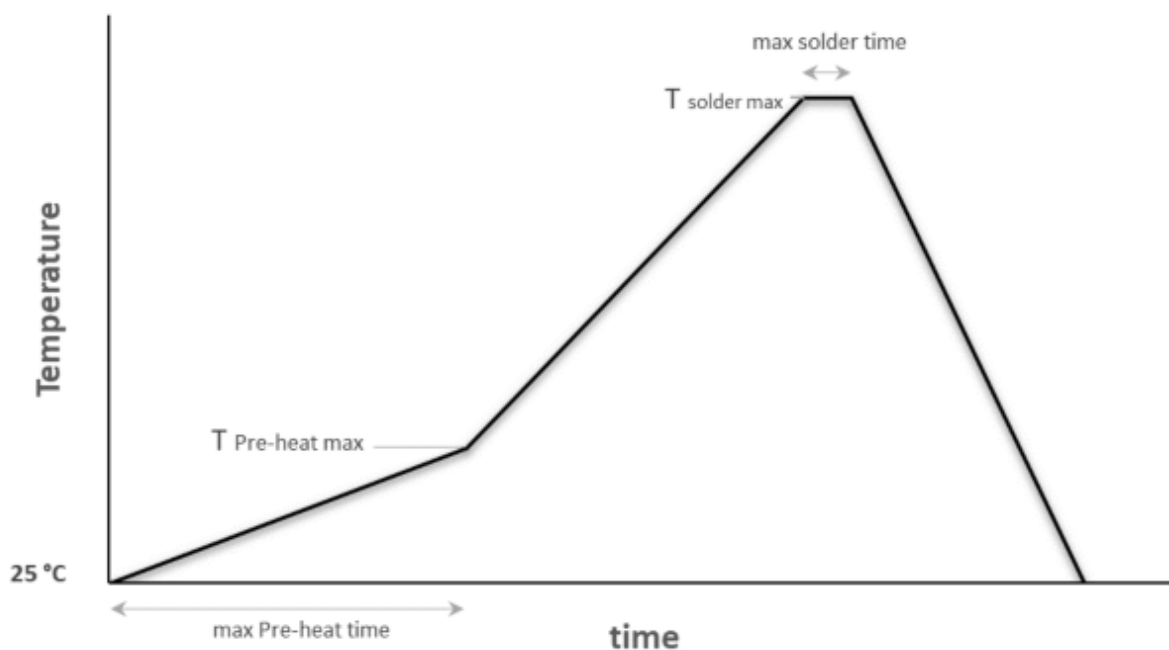


Figure 12. Soldering temperature profile


## Recommended usage instructions

### Storage

1. Store in a moisture free environment (< 60%RH).
2. Store between 5°C and 30°C.
3. After storing, clean with isopropyl alcohol. Do not use acetone, MKS or ultrasonic baths to clean.

### Handling

1. Use ESD tweezers to hold the LED by the sides of the package.
2. Do not touch the optical surface of the LED.
3. Observe appropriate ESD precautions when handling the LED.

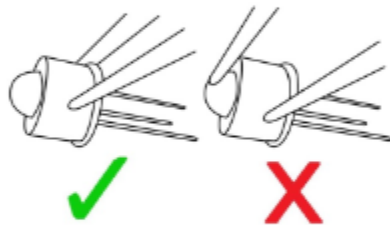

### Circuit


1. Driving circuits must be designed to operate the LEDs in forward bias only.
2. A driver IC delivering constant current operation is recommended.
3. The recommended circuit for multiple LEDs involves driving individual load resistances. Each LED can have different forward voltages for the same current.


### Safety information

The LED emits invisible UV light during operation. UV light is hazardous to eyes and skin. Long term exposure to UV light increases the risk of skin and eye cancer. Always ensure adequate control measures are in place to prevent exposure to UV light when the LED is operational.

### Compliance

RoHS & REACH Compliant.

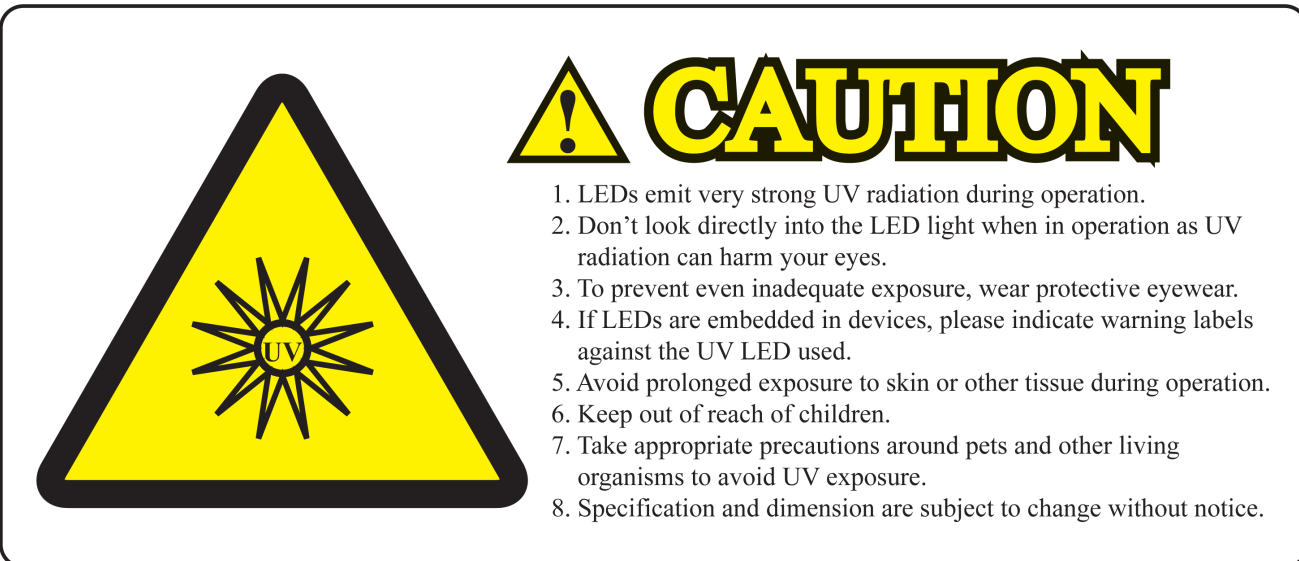

 **CAUTION**

1. LEDs emit very strong UV radiation during operation.
2. Don't look directly into the LED light when in operation as UV radiation can harm your eyes.
3. To prevent even inadequate exposure, wear protective eyewear.
4. If LEDs are embedded in devices, please indicate warning labels against the UV LED used.
5. Avoid prolonged exposure to skin or other tissue during operation.
6. Keep out of reach of children.
7. Take appropriate precautions around pets and other living organisms to avoid UV exposure.
8. Specification and dimension are subject to change without notice.

The information contained herein is subject to change without notice.

2025-02-10