

Peak Emission Wavelength: 405nm


The MTE4050N1-UV is a 5mm water clear LED designed for applications requiring high brightness and high reliability packaged with straight leads.

FEATURES

- > High Brightness
- > High Reliability
- > Water Clear with Flange
- > Housing without Standoff Leads

APPLICATIONS

- > Currency Validation
- > Driver License & Passport Identification
- > Medical & Analytical Instruments
- > Fluorescence

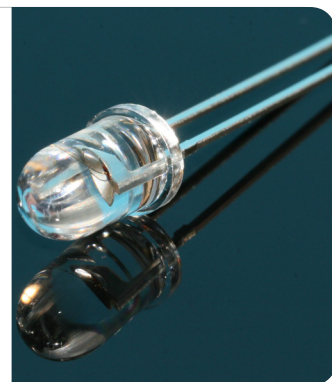

Absolute Maximum Ratings (Ta=25°C)




ITEMS	SYMBOL	RATINGS	UNIT
Forward Current	IF	40	mA
Peak Forward Current*1	IFP	100	mA
Power Dissipation	PD	120	mW
Operating Temperature Range	Topr	-40 ~ +85	°C
Storage Temperature Range	Tstg	-40 ~ +100	°C
Lead Soldering Temperature*2	Tls	260	°C




*1: Test Conditions: 1/10 duty cycle @ 1KHz. *2: Time 5 Sec max, Position: Up to 3mm from the body.

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Power Output	Po	IF=20mA	--	21.7	--	mW
Forward Voltage	VF	IF=20mA	--	3.1	--	V
Reverse Voltage	VR	IR=2μA	--	8.0	--	V
Peak Emission Wavelength	λp	IF=20mA	--	405	--	nm
Viewing Angle	Θ	IF=20mA	--	10	--	deg.
Spectral Bandwidth at 50%	Δλ _{0.5}	IF=20mA	--	16	--	nm

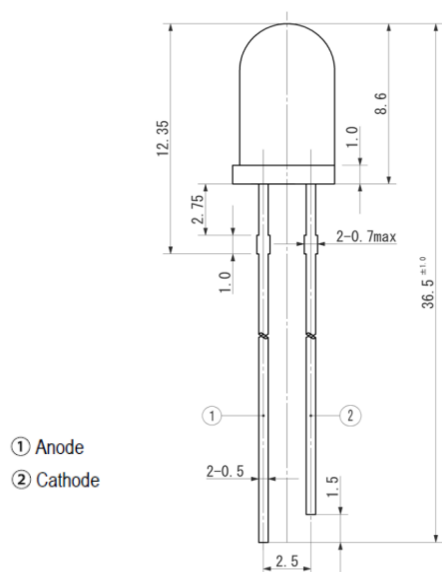

SPECTRAL RESPONSE

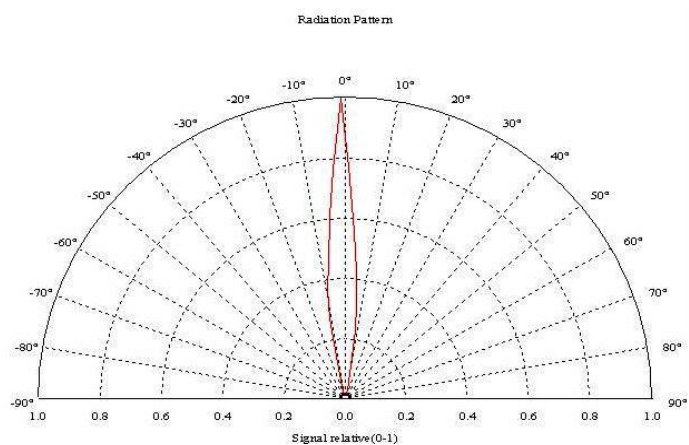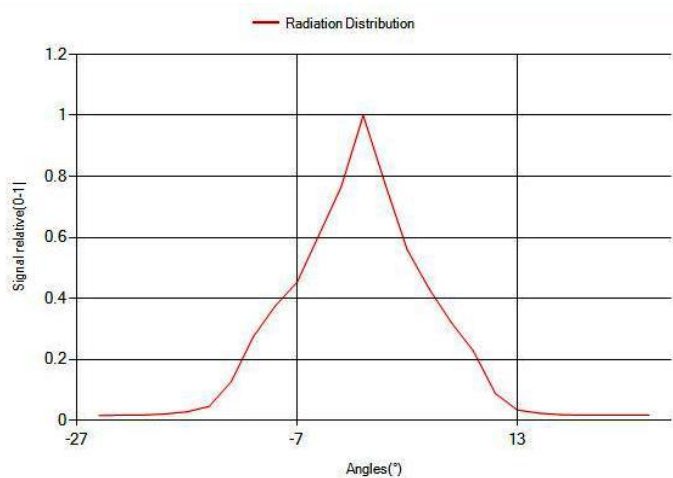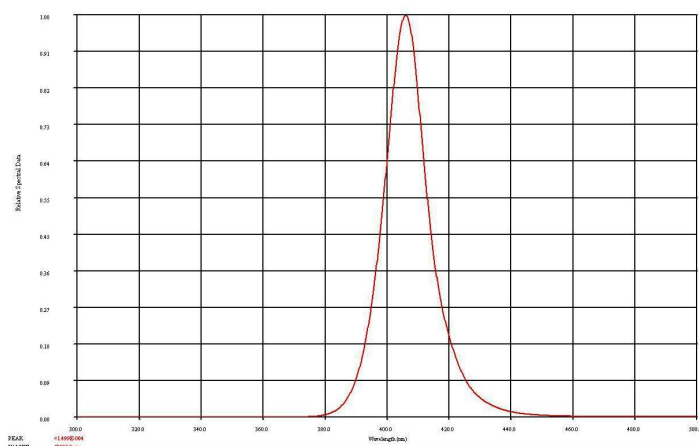



 CAUTION

1. LEDs emit very strong UV radiation during operation.
2. Don't look directly into the LED light when in operation as UV radiation can harm your eyes.
3. To prevent even inadequate exposure, wear protective eyewear.
4. If LEDs are embedded in devices, please indicate warning labels against the UV LED used.
5. Avoid prolonged exposure to skin or other tissue during operation.
6. Keep out of reach of children.
7. Take appropriate precautions around pets and other living organisms to avoid UV exposure.
8. Specification and dimension are subject to change without notice.