

Peak Emission Wavelengths: 365, 460, 527, 570, 630, 780, 850, 940, 1200nm


The MTHNMCC-9 is a multi-chip emitter designed for applications requiring various emission sources in a small, densely packaged area. These devices can be custom designed for specific wavelengths and outputs.

FEATURES

- > 0.3x0.3in FR-4 COB(Chip on board) package
- > Various Wavelength Combinations Available
- > High Output Power

APPLICATIONS

- > Spectroscopy
- > Medical / Chemical Analysis
- > Biofluorescence Analysis



Absolute Maximum Ratings (Ta=25°C)



ITEMS	SYMBOL	RATINGS									UNIT
		365	460	527	570	630	780	850	940	1200	
Forward Current (DC)	IF	25	50	50	50	30	50	80	60	50	mA
Forward Current (Pulse) *1	IFP	100	400	400	100	80	500	500	500	100	mA
Reverse Voltage	VR	5	5	5	5	5	5	5	5	5	V
Power Dissipation	PD	100	60	60	180	80	120	180	100	100	mW
Operating Temperature Range	Topr	-20~+60									°C
Storage Temperature Range	Tstg	-30~+85									°C
Junction Temperature	Tj	--									°C

Note*1: Tw=10μsec, T=10msec

Electrical & Optical Characteristics (Ta=25°C)

ITEMS	SYMBOL	WAVELENGTH	CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	VF	365	IF=20mA	--	3.70	--	V
Forward Voltage	VF	460	IF=20mA	--	2.76	--	V
Forward Voltage	VF	527	IF=20mA	--	2.47	--	V
Forward Voltage	VF	570	IF=20mA	--	2.04	--	V
Forward Voltage	VF	630	IF=20mA	--	1.93	--	V
Forward Voltage	VF	780	IF=20mA	--	1.59	--	V
Forward Voltage	VF	850	IF=20mA	--	1.42	--	V
Forward Voltage	VF	940	IF=20mA	--	1.39	--	V
Forward Voltage	VF	1200	IF=20mA	--	1.02	--	V


Electrical & Optical Characteristics (Ta=25°C)

ITEMS	SYMBOL	WAVELENGTH	CONDITIONS	MIN	TYP	MAX	UNIT
Power Output	PO	365	IF=20mA	--	0.25	--	mW
Power Output	PO	460	IF=20mA	--	11.55	--	mW
Power Output	PO	527	IF=20mA	--	8.56	--	mW
Power Output	PO	570	IF=20mA	--	0.48	--	mW
Power Output	PO	630	IF=20mA	--	4.94	--	mW
Power Output	PO	780	IF=20mA	--	6.36	--	mW
Power Output	PO	850	IF=20mA	--	6.86	--	mW
Power Output	PO	940	IF=20mA	--	6.19	--	mW
Power Output	PO	1200	IF=20mA	--	2.92	--	mW
Peak Emission Wavelength	λ_p	365	IF=20mA	--	370	--	nm
Peak Emission Wavelength	λ_p	460	IF=20mA	--	460	--	nm
Peak Emission Wavelength	λ_p	527	IF=20mA	--	525	--	nm
Peak Emission Wavelength	λ_p	570	IF=20mA	--	578	--	nm
Peak Emission Wavelength	λ_p	630	IF=20mA	--	634	--	nm
Peak Emission Wavelength	λ_p	780	IF=20mA	--	780	--	nm
Peak Emission Wavelength	λ_p	850	IF=20mA	--	846	--	nm
Peak Emission Wavelength	λ_p	940	IF=20mA	--	936	--	nm
Peak Emission Wavelength	λ_p	1200	IF=20mA	--	1189	--	nm
Spectral Line Half Width	$\Delta\lambda$	365	IF=20mA	--	17	--	nm
Spectral Line Half Width	$\Delta\lambda$	460	IF=20mA	--	21	--	nm
Spectral Line Half Width	$\Delta\lambda$	527	IF=20mA	--	28	--	nm
Spectral Line Half Width	$\Delta\lambda$	570	IF=20mA	--	18	--	nm
Spectral Line Half Width	$\Delta\lambda$	630	IF=20mA	--	19	--	nm
Spectral Line Half Width	$\Delta\lambda$	780	IF=20mA	--	24	--	nm
Spectral Line Half Width	$\Delta\lambda$	850	IF=20mA	--	23	--	nm
Spectral Line Half Width	$\Delta\lambda$	940	IF=20mA	--	39	--	nm
Spectral Line Half Width	$\Delta\lambda$	1200	IF=20mA	--	54	--	nm

Electrical & Optical Characteristics (Ta = 25°C)


ITEMS	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Breakdown Voltage	VR	IR=10uA	3.0	5	--	V
Half Intensity Beam Angle	Θ	IF=20mA	--	±60	--	deg

Package Dimensions

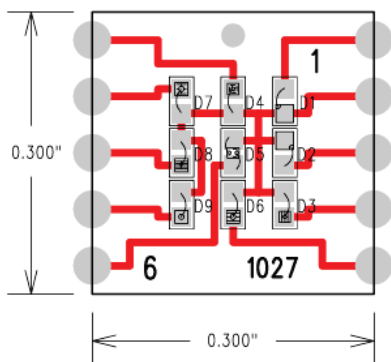


DEVICE CONFIGURATION


PIN #		WAVELENGTH	P (ANODE UP)	N (CATHODE UP)	P/N
1	D1	460nm	X		EZ500-p
3	D2	527nm	X		EZ500-p
4	D3	570nm		X	OPC5700-24
10	D4	630nm		X	OP636C
6	D5	365nm	X	X	OPC3650-13
5	D6	780nm		X	OPC7800R-IR
9	D7	850nm		X	OP861C
8	D8	940nm		X	943chip
7	D9	1200nm		X	OPC1202C
2	COMMON CATHODE				

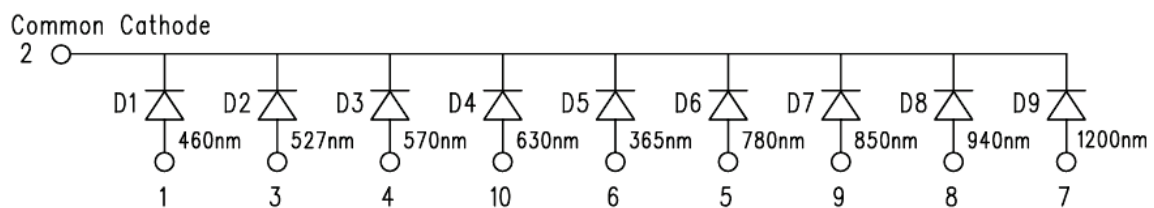


365nm Spectral Response

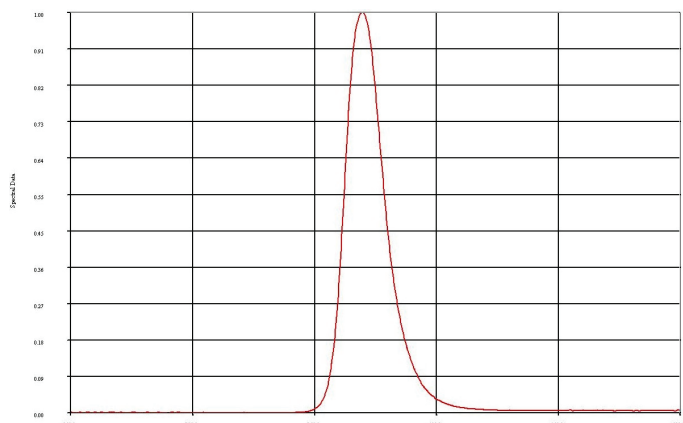


460nm Spectral Response

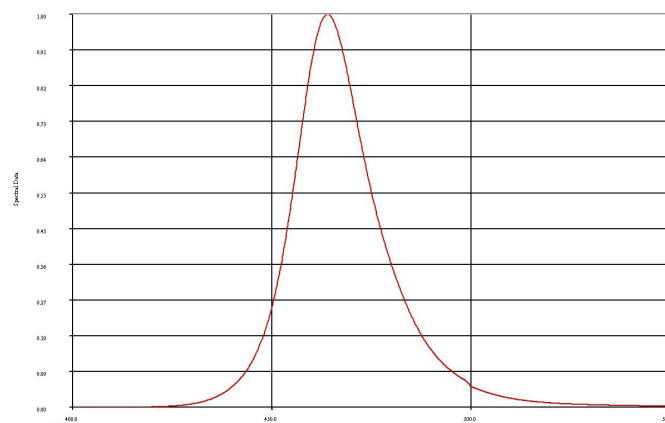


527nm Spectral Response

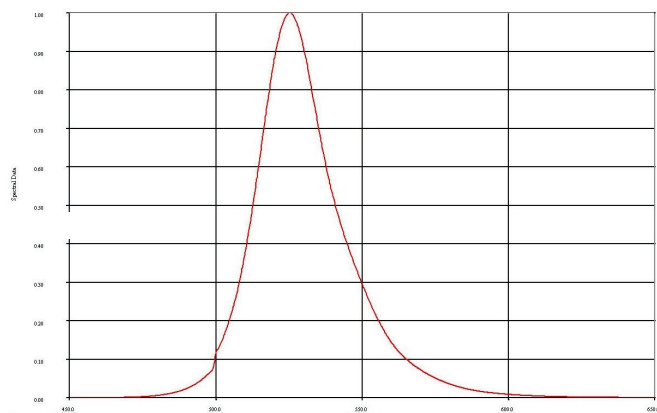


570nm Spectral Response

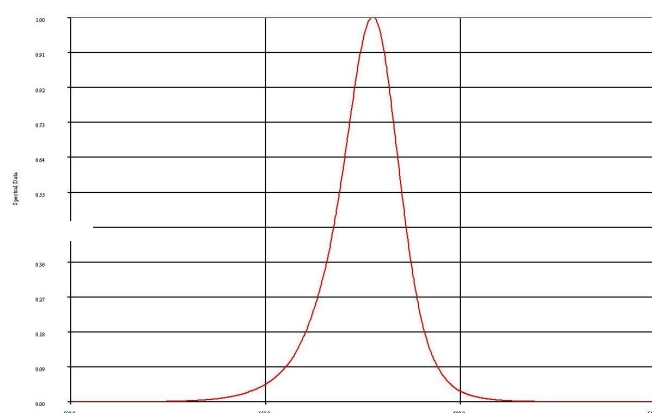

630nm Spectral Response

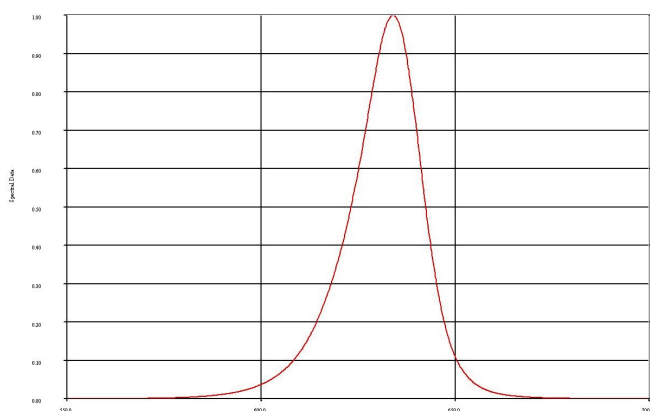


780nm Spectral Response

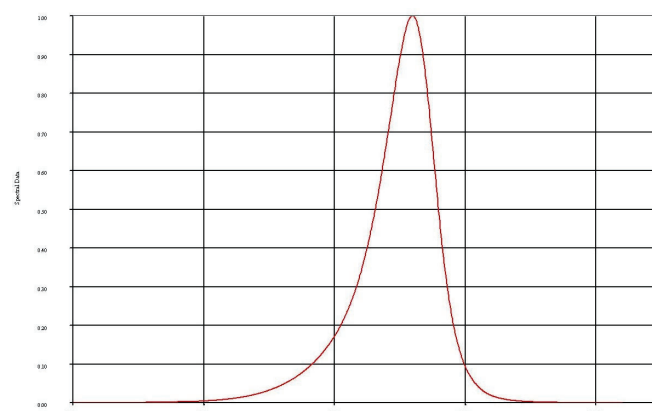


The information contained herein is subject to change without notice.

2026-05-28


850nm Spectral Response

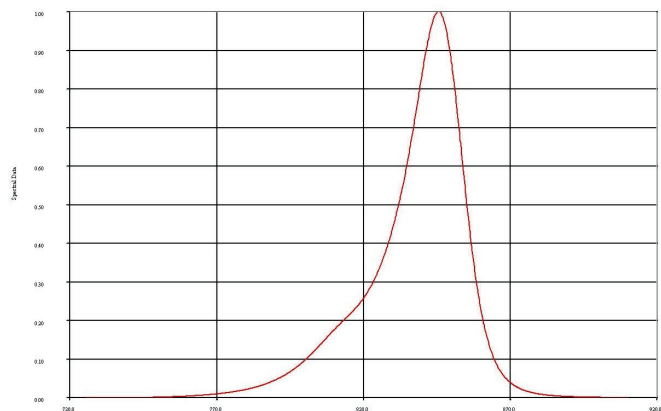

940nm Spectral Response

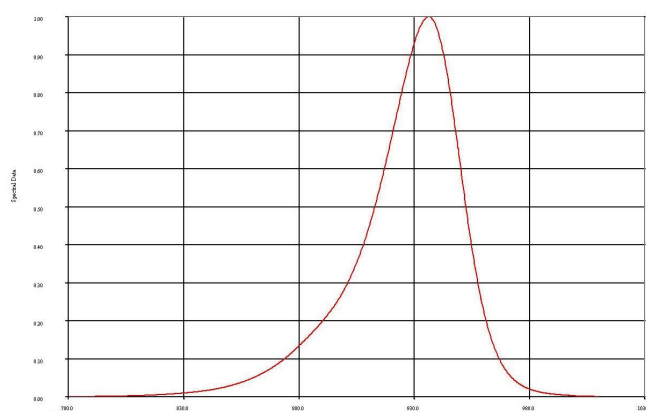

1200nm Spectral Response

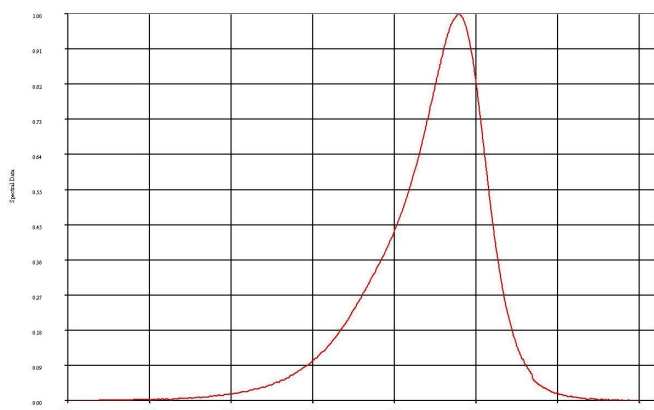

The information contained herein is subject to change without notice.

2026-05-28