


Peak Emission Wavelength: 235nm

The MTSM2350D-UV is a powerful, small-footprint Far UV-C emitting device. A peak wavelength of 235nm LED creates new feasibility for a variety of applications. This 235nm LED is effective for Water quality detection of Nitrate (NO₃) Nitrate (NO₂), gas detection of Carbon dioxide (CO₂) and liquid chromatography.



FEATURES

- > Far Ultraviolet LED
- > 30 degree collimated source
- > Mercury Free
- > ESD protection
- > Silanna Safe

APPLICATIONS

- > Chemical and biological analysis
- > Water quality monitoring
- > Gas sensing
- > Liquid chromatography
- > Disinfection

Absolute Maximum Ratings (Ta=25°C)



ITEMS	SYMBOL	RATINGS	UNIT
Forward Current	IF	100	mA
Operating Temperature	Topr	5 ~ +60	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Junction Temperature	T _j	85	°C
ESD Classification		2	

Note: Also available on PCB - Starboard MTSM2350D-UV (See Page 5)

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN.	TYP	MAX.	UNIT
Forward Voltage	VF	IF=20mA	5	--	8	V
Peak Wavelength	λ _p	IF=20mA	230	--	240	nm
Radiant Flux	PO	IF=20mA	0.08	--	--	mW
Radiant Intensity	I	IF=20mA	0.16	--	--	mW/Sr
FWHM	Δλ	IF=20mA	--	9	18	nm
View Angle	Θ	IF=20mA	--	33	--	deg
Power Dissipation	PD	IF=20mA	--	0.12	--	W
Thermal Resistance Junction-Case	T _{th}	IF=20mA	--	5	--	°C/W

Package Dimensions

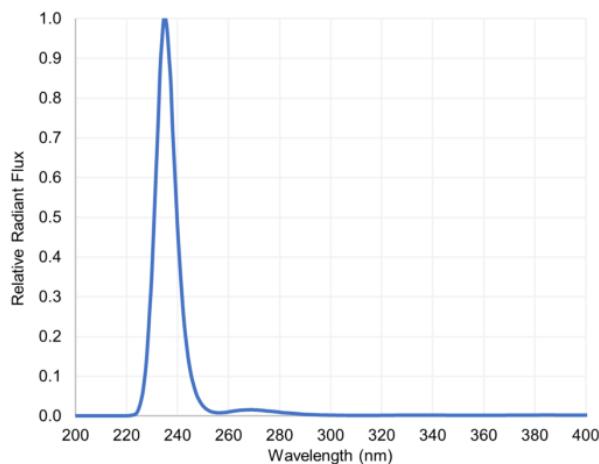
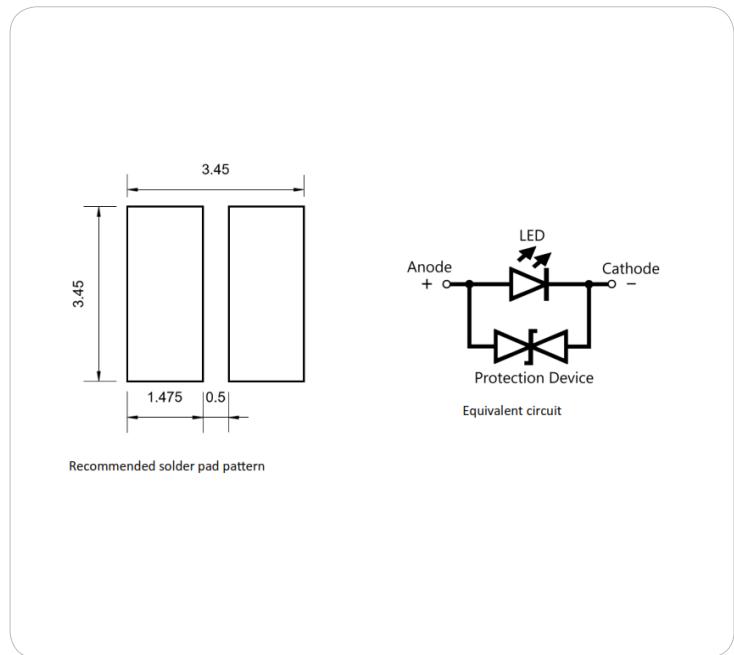
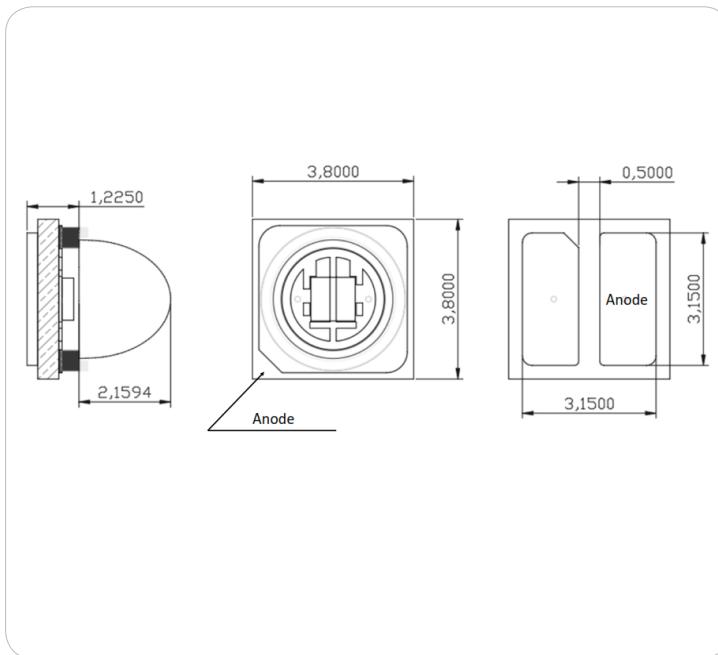


Figure 1. Relative emission intensity vs wavelength
 $T_A=25\text{ }^\circ\text{C}$, $I_F = 20\text{ mA}$

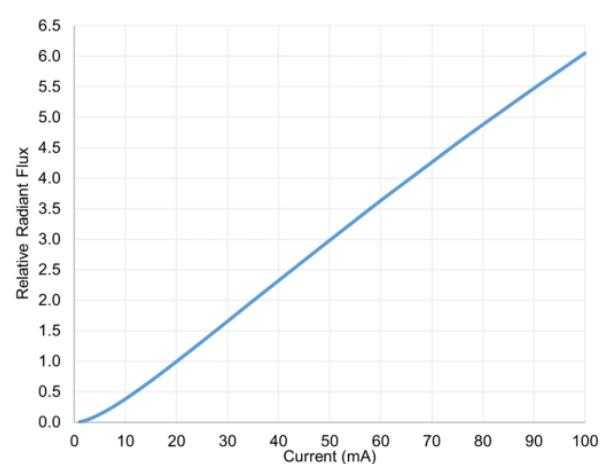


Figure 2. Relative radiant flux vs forward current
 $T_A=25\text{ }^\circ\text{C}$

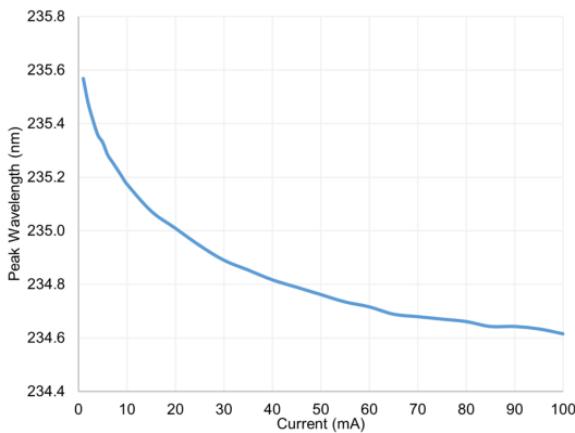


Figure 3. Peak wavelength vs forward current

$T_A=25\text{ }^\circ\text{C}$

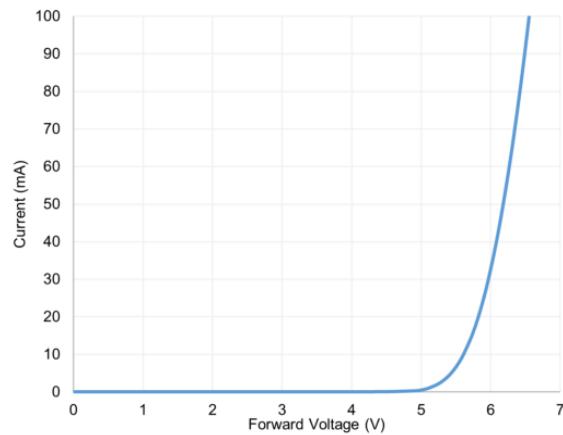


Figure 4. Forward current vs forward voltage

$T_A=25\text{ }^\circ\text{C}$

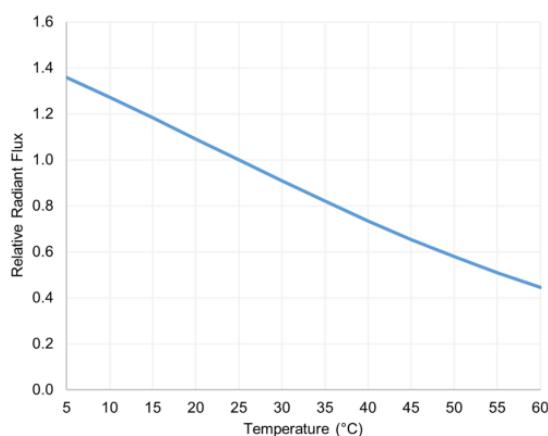


Figure 5. Relative radiant flux vs temperature (Tsolder)

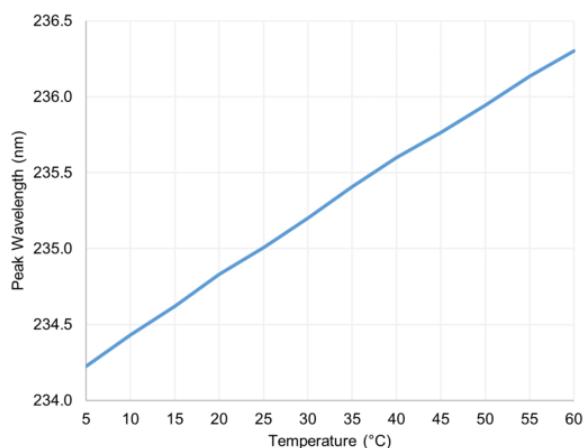


Figure 6. Peak wavelength vs temperature (Tsolder)

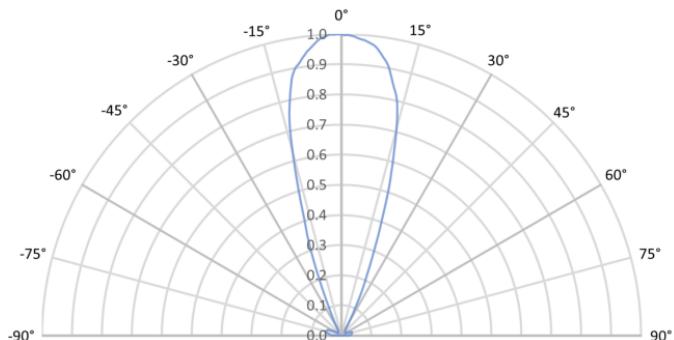


Figure 7. Radiation pattern
 $T_A=25\text{ }^\circ\text{C}$, $I_F = 20\text{ mA}$

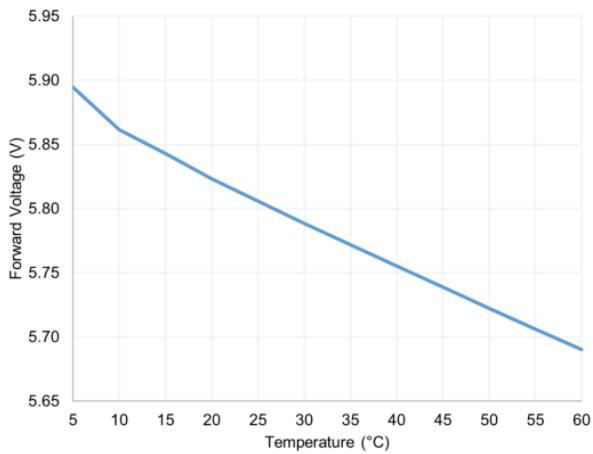


Figure 8. Forward voltage vs temperature (T_{solder})



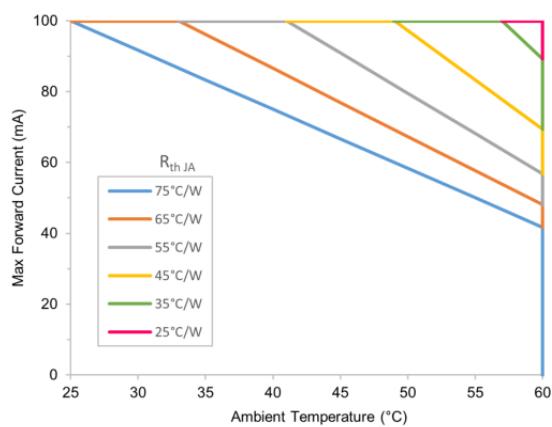


Figure 9. Max forward current de-rating

Starboard Dimensions

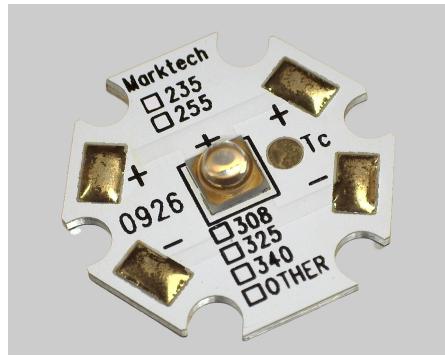

Aluminum Core Board 0.040" (1.02mm) Thickness
Overall Board Dimensions: +/- 0.010" (0.254mm)

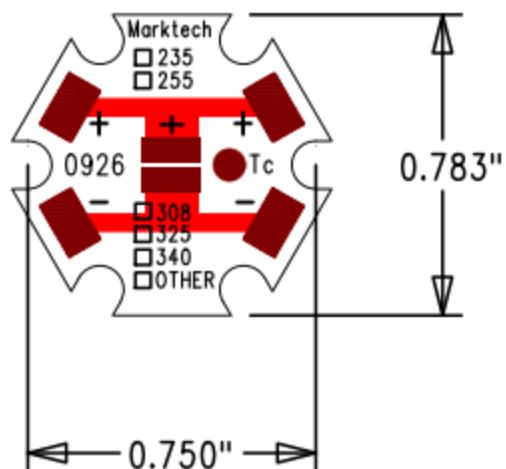


We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

The information contained herein is subject to change without notice.

2025-11-11

Soldering conditions

Profile Feature	Lead-based assembly	Lead-free assembly
Average ramp-up rate ($T_{s_{\max}}$ to T_p)	3° C/second max.	3° C/second max.
Preheat: -Temperature min. ($T_{s_{\min}}$) -Temperature Max ($T_{s_{\max}}$) -Time ($T_{s_{\min}}$ to $T_{s_{\max}}$) (t_s)	100 °C 150 °C 60-120 seconds	150 °C 200 °C 60-180 seconds
Time maintained above: -Temperature (T_L) -Time (t_L)	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak temperature (T_p)	240 °C	260 °C
Time within 5°C of actual peak temperature (t_p)	10-30 seconds	20-40 seconds
Ramp-down rate	6 °C/second max.	6 °C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.

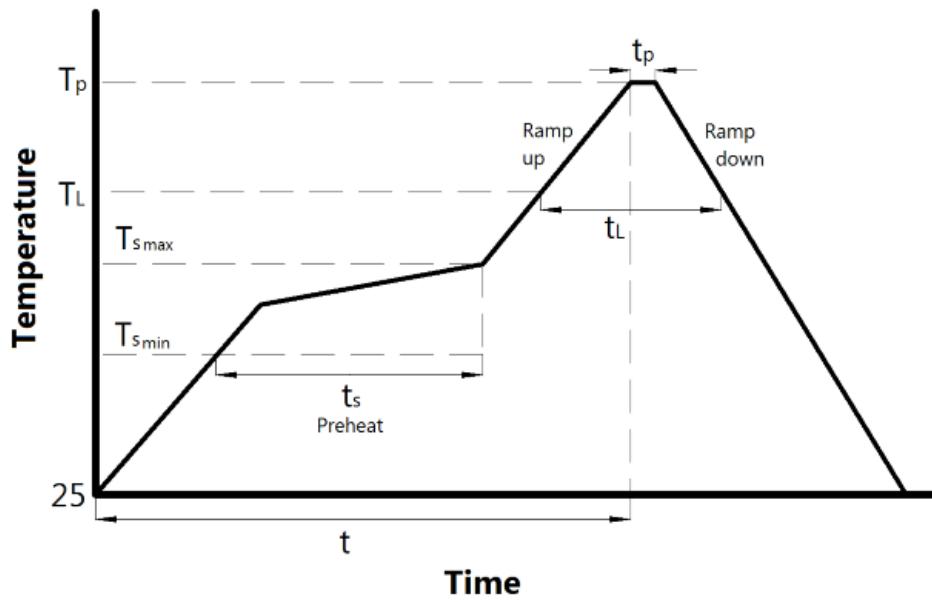

Reflow soldering temperature profile


Recommended usage instructions

Storage

1. Store in a moisture free environment (< 60%RH).
2. Store between 5°C and 30°C.
3. After storing, clean with isopropyl alcohol. Do not use acetone, MKS or ultrasonic baths to clean.

Handling

1. Use ESD tweezers to hold the LED by the sides of the package.
2. Do not touch the optical surface of the LED.
3. Observe appropriate ESD precautions when handling the LED.

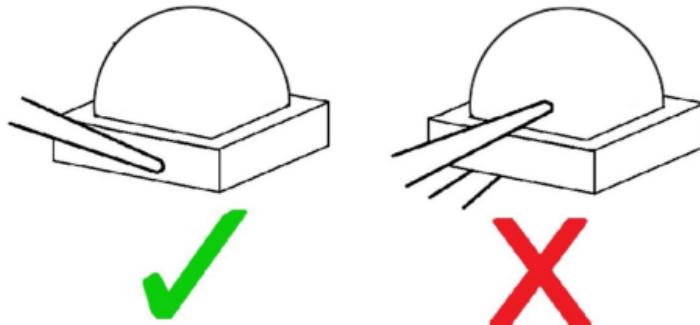

Circuit


1. Driving circuits must be designed to operate the LEDs in forward bias only.
2. A driver IC delivering constant current operation is recommended.
3. The recommended circuit for multiple LEDs involves driving individual load resistances. Each LED can have different forward voltages for the same current.

Safety information

The LED emits invisible UV light during operation. UV light is hazardous to eyes and skin. Long term exposure to UV light increases the risk of skin and eye cancer. Always ensure adequate control measures are in place to prevent exposure to UV light when the LED is operational.

Compliance

RoHS Compliant.

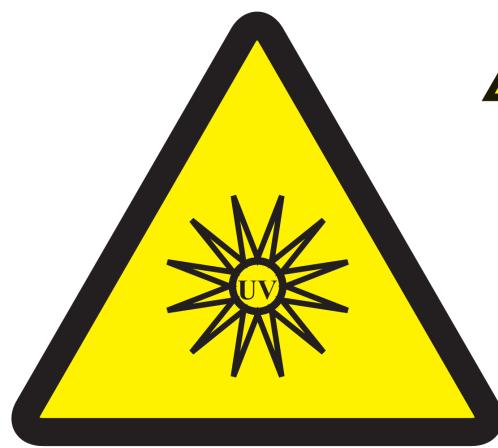

! CAUTION

1. LEDs emit very strong UV radiation during operation.
2. Don't look directly into the LED light when in operation as UV radiation can harm your eyes.
3. To prevent even inadequate exposure, wear protective eyewear.
4. If LEDs are embedded in devices, please indicate warning labels against the UV LED used.
5. Avoid prolonged exposure to skin or other tissue during operation.
6. Keep out of reach of children.
7. Take appropriate precautions around pets and other living organisms to avoid UV exposure.
8. Specification and dimension are subject to change without notice.

The information contained herein is subject to change without notice.

2025-11-11

Global Headquarters, 3 Northway Lane North, Latham, NY 12110, USA www.marktechopto.com

TOLL FREE: 1-800-984-5337 • PHONE: 518-956-2980 • FAX: 518-785-4725 • EMAIL: info@marktechopto.com